

LED Compact Wall Pack



Limitless Options
for the following applications:

TCP's LED Non-Cutoff Compact Wall Pack combines the look of a traditional wall pack with the benefits of LED. An efficient alternative to HID, these wall packs deliver bright uniform light while providing energy savings. A long 50,000 hour rated life significantly decreases maintenance labor and material costs over the life of the fixture.

The robust die-cast aluminum housing incorporates an impact-resistant polycarbonate lens. An integrated photocell is optional for dusk-to-dawn control. The wall pack mounts directly to a standard junction box for easy retrofit of traditional fixtures.

- Site Lighting
- Security Lighting
- Pathways
- Entrances
- Perimeters



5 YEAR
WARRANTY

we know light.™

LED Non-Cutoff Compact Wall Pack - Polycarbonate Lens

Applications

This product family can be effectively used in outdoor wall mount locations. Commercial, industrial, retail and healthcare exterior lighting; parking lot, cargo door, high wall, area, security, etc.

Construction

- Die-cast aluminum housing
- Impact-resistant polycarbonate lens
- Durable bronze powder coat

Electrical

- cULus wet location rated
- Easy-to-access wiring compartment
- System rated for long 50,000 hour life
- Efficiently delivers up to 100 LPW

Optics

- Polycarbonate lens
- Delivers bright, white light and excellent uniformity




Warranty

Five year limited warranty against defects in manufacturing.

Listings

UL and cUL listed
RoHS Compliant

DLC v4.3 Standard

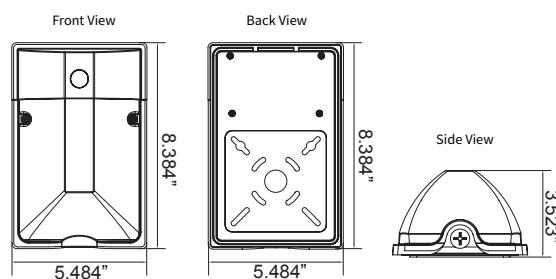

Approximate Luminaire Weight: 2.16 lbs

For the most up-to-date specs and warranty information, please visit www.tcpi.com

ITEM #	DESCRIPTION	DLC	LUMENS	WATTAGE	LPW	VOLTAGE	POWER FACTOR	CCT	CRI	LIFE	L(in.)	H(in.)	W(in.)
LED Compact Wall Pack • 50,000 Hour													
WP1700150	LED Compact Wall Pack • Non Dim 50K	★	1700	17	100	120-277V	≥0.9	5000K	>80	50000	8.4	3.5	5.5
WP1700140S	LED Compact Wall Pack • Non Dim 40K W/PC	★	1700	17	100	120-277V	≥0.9	4000K	>80	50000	8.4	3.5	5.5
WP1700150S	LED Compact Wall Pack • Non Dim 50K W/PC	★	1700	17	100	120-277V	≥0.9	5000K	>80	50000	8.4	3.5	5.5
WP2500150	LED Compact Wall Pack • Non Dim 50K	★	2250	25	90	120-277V	≥0.9	5000K	>80	50000	8.4	3.5	5.5
WP2500140S	LED Compact Wall Pack • Non Dim 40K W/PC	★	2250	25	90	120-277V	≥0.9	4000K	>80	50000	8.4	3.5	5.5
WP2500150S	LED Compact Wall Pack • Non Dim 50K W/PC	★	2250	25	90	120-277V	≥0.9	5000K	>80	50000	8.4	3.5	5.5