

SPECIFICATION SHEET: WH43-UNV-L

This Is An Original Product From Fulham Co., Inc

Description: WORKHORSE Electronic Ballast.


Parallel Lamp Operation.


* This Ballast Will Operate The Following Lamp Types:

CFQ, CFTR, CFT, FT, T9CR, T5CR, T5, T5HO, T6SL, T8, T8SL, T8HO, T10, T12, T12SL, T12HO WHEN USED PER FULHAM'S LAMP/BALLAST WIRING DIAGRAM.

ELECTRICAL DATA (Universal, 120 - 277V)

	, ,
INPUT VOLT: 120V - 277V ± 10%, 50/60Hz	
LAMP TYPE	CFQ, CFTR, CFT, FT, T9CR, T5CR, T5, T5HO, T6SL, T8, T8SL, T8HO, T10, T12, T12SL, T12HO
WIRING DIAGRAM#	REFER TO EACH LAMP TYPE / WATTAGE / No. OF LAMPS FOR WIRING DIAGRAM CHART
POWER FACTOR	HIGH POWER FACTOR
THD	< 10% @ FULL POWER
EMI/RFI COMPLIANCE	FCC PART 18-A
SOUND RATING	"A"
BALLAST TYPE	INSTANT START
VOLTAGE TRANSIENTS	ANSI C82.11 - 1993 / C62.41
MIN. OPERATING TEMP	0 °C (32 °F)
MAX. CASE TEMP	70 °C (158 °F)
APPROVALS/CLASS	UL LISTED, CLASS " P ", 1 OUTDOOR
* NOTE:	PLEASE CONTACT FULHAM CUSTOMER SERVICES FOR PERTICULAR LAMP SPECS.

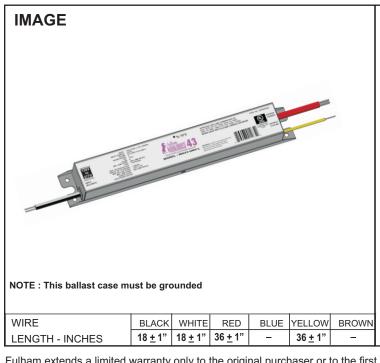

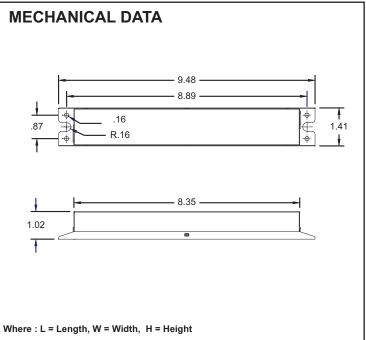

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of <u>5 years</u> from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog (www.fulham.com) **Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described.**2014-467 Rev A