

SPECIFICATION SHEET : WH5-277-L

This Is An Original Product From Fulham Co., Inc

Description : WorkHorse Series Versatile, Solid State Electronic Ballast. Small Case Size, High Power Factor, Light Weight, Available In 120/230/277V 50/60 Hz.


This Ballast Will Operate Following Lamps.

REFER TO LAMP WATTS/TYPE

ELECTRICAL DATA (277 VOLT APPLICATION)

INPUT VOLT: 277V ± 10%, 50/60Hz					
LAMP WATTS/TYPE	LAMPS OPERATED	INPUT WATTS	LINE CURRENT	BALLAST FACTOR	EFFICACY FACTOR
F54T5HO	2	110	0.43	1.04	0.95
CFQ18W	4	78	0.31	1.15	1.48
CR55WT5	2	98	0.38	0.87	0.89
FT40W	2	84	0.33	0.90	1.07
FT40W	3	113	0.43	0.78	0.69
CFTR42W	2	81	0.31	0.92	1.13
F24T5HO	2	52	0.21	1.10	2.11
POWER FACTOR	> 0.9				
THD	< 35 %				
EMI/RFI COMPLIANCE	FCC PART 18-A				
SOUND RATING	" A "				
BALLAST TYPE	INSTANT START				
VOLTAGE TRANSIENTS	ANSI C82.11 - 1993				
INPUT/PROTECTION	FUSE				
OUTPUT/PROTECTION	-				
MIN. OPERATING TEMP	- 30 °C (- 20 °F)				
MAX. CASE TEMP	70 °C (158 °F)				
APPROVALS/CLASS	UL LISTED, CLASS " P ", 1 OUTDOOR				

MECHANICAL DATA

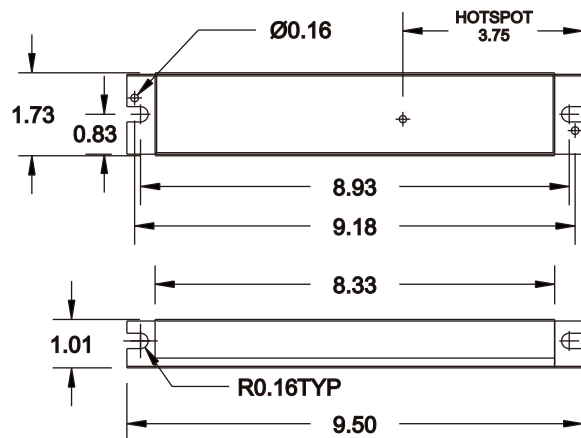

Where : L = Length, W = Width, H = Height

WIRING DIAGRAMS

WIRE	BLACK	WHITE	RED	BLUE	YELLOW	BROWN
LENGTH - INCHES	18 ± 1"	18 ± 1"	36 ± 1"	-	36 ± 1"	-

**WIRING DIAGRAMS DEPENDS
ON THE LAMP TYPE.
PLEASE REFER TO FULHAM'S CATALOG.**

NOTE : This Ballast Must Be Grounded

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 5 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog (www.fulham.com)
Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described.

SPECIFICATION SHEET : WH5-277-L

This Is An Original Product From Fulham Co., Inc

Description : WorkHorse Series Versatile, Solid State Electronic Ballast. Small Case Size, High Power Factor, Light Weight, Available In 120/230/277V 50/60 Hz.


This Ballast Will Operate Following Lamps.

REFER TO LAMP WATTS/TYPE

ELECTRICAL DATA (277 VOLT APPLICATION)

INPUT VOLT: 277V ± 10%, 50/60Hz					
LAMP WATTS/TYPE	LAMPS OPERATED	INPUT WATTS	LINE CURRENT	BALLAST FACTOR	EFFICACY FACTOR
F39T5HO	2	74	0.29	0.89	1.20
FT50W	2	112	0.43	1.09	0.97
FT50W	1	49	0.19	0.80	1.62
F60T12	1	49	0.19	0.92	1.86
F20T12	2	39	0.15	0.92	2.37
F20T12	1	25	0.10	1.11	4.44
CFQ26W	2	53	0.21	1.10	2.05
POWER FACTOR	> 0.9				
THD	< 35 %				
EMI/RFI COMPLIANCE	FCC PART 18-A				
SOUND RATING	" A "				
BALLAST TYPE	INSTANT START				
VOLTAGE TRANSIENTS	ANSI C82.11 - 1993				
INPUT/PROTECTION	FUSE				
OUTPUT/PROTECTION	-				
MIN. OPERATING TEMP	- 30 °C (- 20 °F)				
MAX. CASE TEMP	70 °C (158 °F)				
APPROVALS/CLASS	UL LISTED, CLASS " P ", 1 OUTDOOR				

MECHANICAL DATA

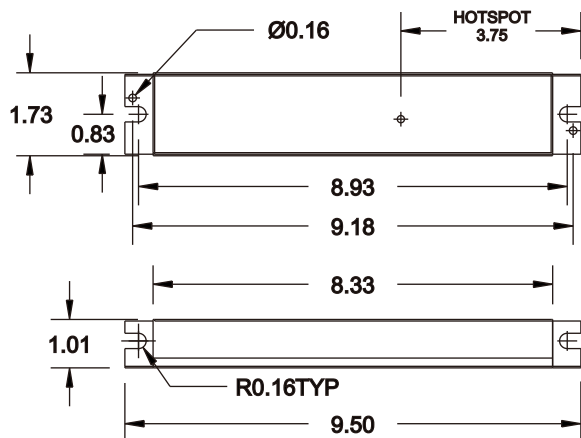

Where : L = Length, W = Width, H = Height

WIRING DIAGRAMS

WIRE	BLACK	WHITE	RED	BLUE	YELLOW	BROWN
LENGTH - INCHES	18 ± 1"	18 ± 1"	36 ± 1"	-	36 ± 1"	-

**WIRING DIAGRAMS DEPENDS
ON THE LAMP TYPE.
PLEASE REFER TO FULHAM'S CATALOG.**

NOTE : This Ballast Must Be Grounded

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 5 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog (www.fulham.com)
Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described.

SPECIFICATION SHEET : WH5-277-L

This Is An Original Product From Fulham Co., Inc

Description : WorkHorse Series Versatile, Solid State Electronic Ballast. Small Case Size, High Power Factor, Light Weight, Available In 120/230/277V 50/60 Hz.


This Ballast Will Operate Following Lamps.

REFER TO LAMP WATTS/TYPE

ELECTRICAL DATA (277 VOLT APPLICATION)

INPUT VOLT: 277V ± 10% , 50/60Hz					
LAMP WATTS/TYPE	LAMPS OPERATED	INPUT WATTS	LINE CURRENT	BALLAST FACTOR	EFFICACY FACTOR
F32T8	3	104	0.40	1.23	1.19
F48T8HO	2	103	0.40	0.67	0.65
CR32W+40W	2	90	0.35	1.35	1.50
	2	90	0.35	1.36	1.51
CR32W	2	73	0.29	1.35	1.85
POWER FACTOR			> 0.9		
THD			< 35 %		
EMI/RFI COMPLIANCE			FCC PART 18-A		
SOUND RATING			" A "		
BALLAST TYPE			INSTANT START		
VOLTAGE TRANSIENTS			ANSI C82.11 - 1993		
INPUT/PROTECTION			FUSE		
OUTPUT/PROTECTION			-		
MIN. OPERATING TEMP			- 30 °C (- 20 °F)		
MAX. CASE TEMP			70 °C (158 °F)		
APPROVALS/CLASS			UL /cUL LISTED, CLASS " P ", 1 OUTDOOR		

MECHANICAL DATA

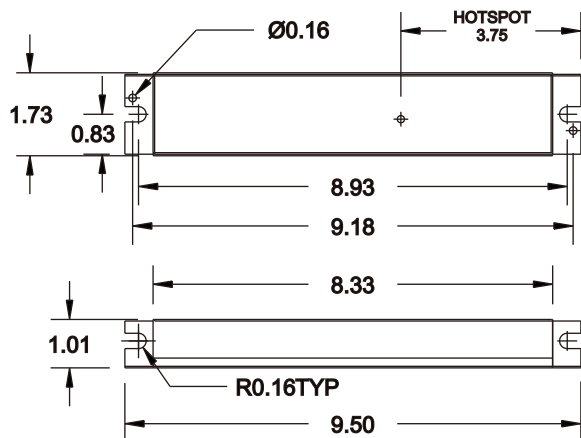

Where : L = Length, W = Width, H = Height

WIRING DIAGRAMS

WIRE	BLACK	WHITE	RED	BLUE	YELLOW	BROWN
LENGTH - INCHES	18 ± 1"	18 ± 1"	36 ± 1"	-	36 ± 1"	-

**WIRING DIAGRAMS DEPENDS
ON THE LAMP TYPE.
PLEASE REFER TO FULHAM'S CATALOG.**

NOTE : This Ballast Must Be Grounded

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 5 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog (www.fulham.com)
Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described.