



## WLMX-C Wet Location Combo



PROJECT: \_\_\_\_\_  
FIXTURE TYPE: \_\_\_\_\_  
LOCATION: \_\_\_\_\_  
CONTACT/PHONE: \_\_\_\_\_




### PRODUCT SPECIFICATIONS

**Internal:** The WLMX-C is the newest addition to our series. The WLMX Combo features performance and reliability in a compact and attractive unit. The WLMX-C has dual input 120/277V and uses a rechargeable, maintenance free Ni-Cd battery. The circuit board features an onboard solid state transformer, low voltage disconnect and brownout protection. Available in either red or green LEDs consuming less than 2W.

**External:** The WLMX-C is UL924 listed for wet location and is constructed from high impact corrosion resistant, thermoplastic. The UV resistant polycarbonate faceplate has an integrated gasket to ensure ingress protection. The WLMX-C includes two sealed and gasketed 3.6V, 1.17W weatherproof heads. Removable chevrons allow for on-site selection. The WLMX-C comes standard in white. Integrated test switch/monitor LED gives immediate unit status.

### DIMENSIONS

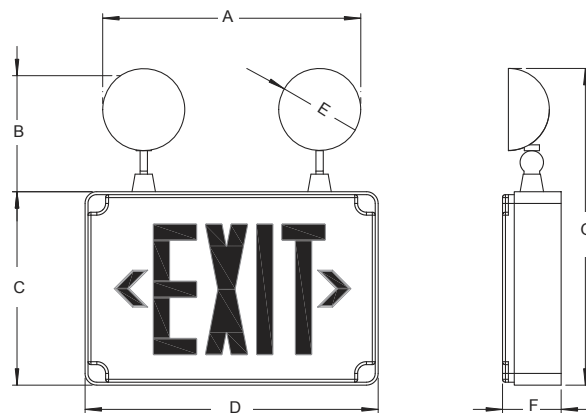

Series	A	B	C	D	E	F	G
WLMX-C	11.01"	4.95"	8.25"	12.5"	3.5"	2.5"	13.5"
	279.6mm	123.73mm	209.5mm	317.50mm	88.9mm	63.5mm	343.11mm


### ORDERING INFORMATION

Series	LED	Options
WLMX-C	R (red)	AT <sup>1</sup> (autotest)
	G (green)	RC <sup>2</sup> (remote capable)

NOTE 1: AT not available with RC.

NOTE 2: Max load per unit: 3W for 90 minutes.

EXAMPLE: WLMX-C-A-R-RC





## WLMX-C Wet Location Combo



PROJECT:

FIXTURE TYPE:

LOCATION:

CONTACT/PHONE:

### EMERGENCY HEADS

Two fully adjustable LED heads ensure emergency lighting performance, accurate positioning and reduced maintenance. Each emergency head totals 1.17W. WLMX-C is remote capable and can operate 2, single head remotes or 1 double head remote. Max load per unit: 3W. Remote heads are available.

### ELECTRICAL

**BATTERY:** The WLMX-C is designed with a 3.6V 900mAh maintenance free sealed nickel cadmium battery that provides minimum emergency duration of 90 minutes. The recharge time of the battery is 24 hours.

**CIRCUIT:** The WLMX-C has a 120/277V solid state transformer. Low voltage disconnect and brownout protection are standard. Red or green LEDs totaling <2W.

### MECHANICAL

WLMX-C features a modern design, a low profile, rounded corners and an overall reduced size making the WLMX-C one of the smaller, code compliant exit signs available. The quick connect installation system allows for effortless surface mount installation. WLMX-C comes standard with universal face (2 stencils & 1 back plate) and mounting canopy. The WLMX-C operating temperature is 10°C to 40°C.

### SELF-POWERED

The WLMX-C is designed to operate on battery power in the event of regular / mains power failure. Both the battery and charger are completely contained within the standard sign. There are no external components and no alteration made to the external dimensions of the standard sign. Status is easily determined via an LED that indicates AC- ON. A push button test switch allows maintenance personnel to quickly confirm the operational status of the exit at any time.

### REMOTES

Remotes compatible with the WLMX-C.

MODEL	# of Heads	Voltage/Wattage
PR1-WP	1	3.6V/1.17W
PR2-WP	2	3.6V/2.34W

### WARRANTY

The WLMX-C comes with a 3-year factory warranty. Deliberate damage, misuse, improper installation effectively void the warranty. For complete warranty details see online.



PR-1



PR-2



PR-WP

### ORDERING INFORMATION

Series	Head #	Options
PR	1 <sup>1</sup> (single head)	B <sup>2</sup> (black housing)
	2 <sup>1</sup> (double head)	

### ORDERING INFORMATION-WEATHER PROOF

Series	Head #	Options
PR-WP	1 <sup>1</sup> (single head)	B <sup>2</sup> (black housing)
	2 <sup>1</sup> (double head)	

NOTE 1: 12 LED per head.

NOTE 2: Minimum order quantity required. Contact factory.

EXAMPLE: PR-1