



# **SERIES AM28 & AM54**

### Fluorescent Power Packs with Sealed Nickel Cadmium Battery

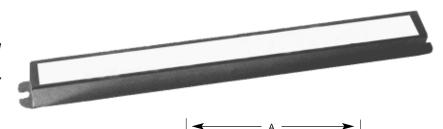

|           | DIM   | Mount<br>Center |       |       |
|-----------|-------|-----------------|-------|-------|
| Model No. | Α     | В               | С     |       |
| AM28      | 14.2" | 1.18"           | 1.15" | 13.7" |
| AM54      | 17.5" | 1.18"           | 1.15" | 17"   |

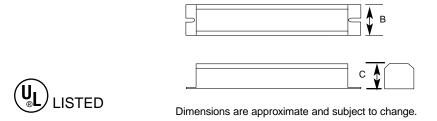

**application** Self-contained emergency ballast designed for use with most T5 or T8 fluorescent lamps. The AM28 & AM54 Series are ideal for use in linear lighting fixtures where ballast space is limited. The AM28 & AM54 Series is UL listed for factory installation or retrofit applications. They powers one existing lamps in a fixture for 90 minutes, the AM28 has an initial output of up to 500 lumens and AM54 to 825 lumens.

### features

- HOUSING: Powder coated steel case and includes one piece indicator light
- and test switch

**INSTALLATION:** simple and inexpensive. Unit mounts easily inside or on top of fixture utilizing wire end caps.

- AM28 Series provides emergency power to most 2'-4' T5 or T8 single linear fluorescent lamp for a minimum of 90 minutes, at an initial output of up to 500 lumens.
- AM54 provides emergency power to most 2'-4' T5 or T8 single linear lamp including HO and 40-55 watt 4 pin long compact fluorescent lamps for a minimum of 90 minutes, at an initial output of up to 825 lumens.
- Will cold start and operate most 2'-4' T5 or T8 single linear fluorescent lamps.
- Allows the same fixture to be used for both normal and emergency operation.
- U.L. listed for new or retrofit installation.

#### ■ ELECTRONICS:

- · Fully automatic solid state charger.
- Automatic transfer relay energizes lamp instantaneously upon failure of normal AC supply.
- CONTROLS: One piece indicator light and test switch
- **POWER REQUIREMENTS:**

120/277 dual voltage, 60 Hz, 2.5 watts.

## unit selection chart

| Model No. | Lamps Operated In<br>Emergency Mode   | Emergency<br>Illumination Time | Lumens | Warranty    |
|-----------|---|--------------------------------|--------|-------------|
| AM28      | 1 lamp 2'-4'<br>T5 or T8 single<br>linear fluorescent lamp                          | 90 minutes                     | 500    | 5 year full |
| AM54      | 1 lamp 2'-4' T5 or T8<br>single linear lamp<br>including HO and 40-55<br>watt 4 pin | 90 minutes                     | 825    | 5 year full |

### battery

Maintenance-free, sealed, high temperature nickel cadmium battery.

Lightalarms Electronics Special Equipment • Page 41