


Decorative Style Equipment 6 Volt Maintenance-Free Battery

The SQUARE-LITE (No Remote Capability)
The SQUARE-LITE Master (With Remote Capability)

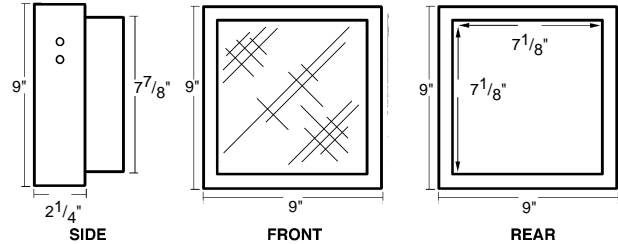

MODEL SQG and SQG-D:
Sealed lead calcium battery.

MODEL SQN and SQN-D:
Sealed nickel cadmium battery.



application For institutional and commercial environments where overall style of decor is essential and where directional lighting is not critical.

features

- **CONSTRUCTION:** Molded from impact resistant, flame retardant, thermoplastic. Matte white case, satin black back, clear prismatic lens.
- **MOUNTING:** Can be surface ceiling mounted. SQR Kit available for semi-recessing into ceiling. FSQR Kit available for full recessing into ceiling. Bar hangers supplied with recessed kit.
- **ELECTRONICS:**
 - Automatic, temperature compensated, pulse type charger.
 - High capacity, automatic, dust tight instantaneous transfer relay.
 - Low voltage disconnect prevents overdischarge of battery. Automatic brownout protection is provided.
 - Labor saving AC line latch prevents battery discharge during installation to a non-energized circuit.
- **CONTROLS:**
 - Red charger monitor LED indicates state of charge of the battery.
 - Momentary test switch for quick operational check of entire system.
- **POWER REQUIREMENTS:**
120/277 Volt AC.

battery

6 volt long life, maintenance-free sealed lead calcium or nickel cadmium.

lamp

Furnished with one high efficiency Tungsten halogen lamp. Provides a non-directional even light distribution with beam spread of more than 170°.

options

(Add Suffix to Model No.) Suffix
Self or Improved Diagnostics . . . -SD or -ID
Voltmeter (not available with diagnostics) . . -V
Two Lamps -2
Polycarbonate Lens -PL
Fully Recessed Metal -RM

Note: Certain option combinations may effect the UL listing. Please contact the factory for specifics.

accessories

(Order as separate item) Model
Guard (Semi-Recessing) WG1
Guard (Full-Recessing) WG11
Semi-Recessing Kit SQR
Full-Recessing Kit FSQR
Matching style remote fixture, Model ELF644 available. See pages 44-45.

ordering format

SQ	G	-2/LH7	-V
Series	Battery Type	Lamp Suffix	Option (Voltmeter)

unit selection chart

NO REMOTE CAPABILITY

Volts	Model No. (unit/Lamp Suffix)	Battery	Capacity in Watts to 87 1/2% of Nominal Battery Voltage		Standard Lamps		
			1 1/2 Hrs.	2 Hrs.	Watts	Type	Lamp Rplc. No.
6	SQG/LH7	Sealed Lead Cal.	10	—	10	Halogen	580.0017
	SQN/LH7	Sealed NiCad.	10	—	10	Halogen	580.0017

WITH REMOTE CAPABILITY

6	SQG-D/LH5	Sealed Lead Cal.	24	18	8	Halogen	580.0013
	SQN-D/LH5	Sealed NiCad.	24	18	8	Halogen	580.0013