


DIMENSIONS

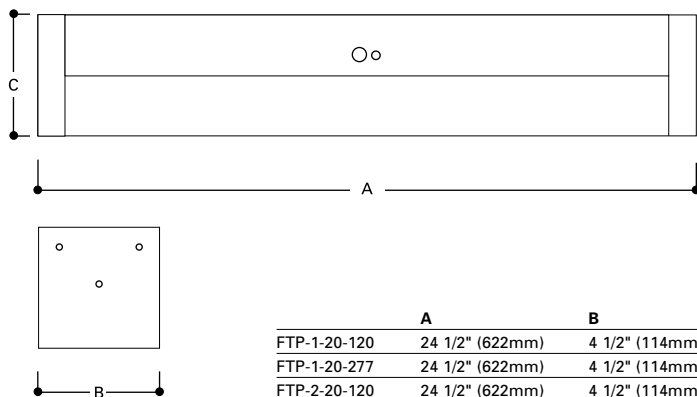

	A	B	C
FTP-1-20-120	24 1/2" (622mm)	4 1/2" (114mm)	4 1/2" (114mm)
FTP-1-20-277	24 1/2" (622mm)	4 1/2" (114mm)	4 1/2" (114mm)
FTP-2-20-120	24 1/2" (622mm)	4 1/2" (114mm)	4 1/2" (114mm)
FTP-2-20-277	24 1/2" (622mm)	4 1/2" (114mm)	4 1/2" (114mm)
FTP-1-40-120	48 1/2" (1232mm)	4 1/2" (114mm)	4 1/2" (114mm)
FTP-1-40-277	48 1/2" (1232mm)	4 1/2" (114mm)	4 1/2" (114mm)
FTP-2-40-120	48 1/2" (1232mm)	4 1/2" (114mm)	4 1/2" (114mm)
FTP-2-40-277	48 1/2" (1232mm)	4 1/2" (114mm)	4 1/2" (114mm)

DESCRIPTION

The FTP Tamperproof Series provides peace of mind and a safeguard for fluorescent fixtures. Steel and polycarbonate components combine to allow sufficient light output with a high level of tamperproof protection.



FTP Tamperproof

**Tamper Proof
Surface Mount
Emergency Unit
Fluorescent Lamps**

EMERGENCY LIGHTING

ORDERING INFORMATION

Catalog No.	No. of Lamps	Watts/Lamp
FTP-1-17-120	1	17
FTP-1-32-120	1	32
FTP-2-17-120	2	17
FTP-2-32-120	2	32
FTP-1-20-120	1	20
FTP-1-20-277	1	20
FTP-2-20-120	2	20
FTP-2-20-277	2	20
FTP-1-40-120	1	40
FTP-1-40-277	1	40
FTP-2-40-120	2	40
FTP-2-40-277	2	40

Note: Units are not supplied with lamps.

- Fully automatic solid state charger; automatic transfer relay energizes lamp instantaneously upon failure of normal AC power
- External test switch and pilot light supplied
- Surface mounting
- Sealed maintenance-free long life nickel cadmium battery
- High-impact polycarbonate lens
- Housing constructed of 16 gauge steel
- Unit is tamperproof and vandal-resistant
- Battery provides emergency power to one lamp for 90 minutes
- T12 or T8 fluorescent lamp technology
- Local 3 IBEW