


Shown with  
Weatherproof  
CPS-4X Cover

*Decorative Style Equipment  
6 Volt Maintenance-Free  
Lead Calcium Battery*

*Available with Halogen Lamps*

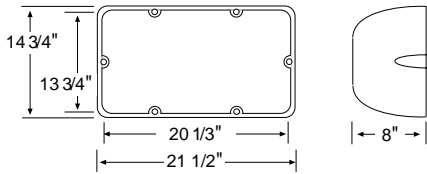

CPS-4X Cover  
Dimensions



Shown with Halogen Lamps



**application** Aesthetically attractive, economical unit ideal for commercial or institutional facilities. Unit offers easy installation and reliable performance in a compact, contemporary design.

## features

- **CONSTRUCTION:** Injection molded from high impact, scratch and corrosion resistant thermoplastic in an architecturally attractive mist white color.
- **QUICK AND EASY INSTALLATION:** Easily mounts to wall or ceiling with independent, universal mounting plate. AC and battery quick connect plugs simplify wiring for quick and easy installation.
- **ELECTRONICS:**
  - Automatic, temperature compensated, pulse type charger.
  - Low voltage disconnect prevents overdischarge of battery. Automatic brown out protection is provided.
  - High capacity, automatic, dust tight instantaneous transfer relay.
  - Labor saving AC line latch prevents battery discharge during installation to a non-energized circuit.
- **INSTRUMENTATION:** Combination test switch/charge monitor LED indicates battery is on charge and allows for periodic testing of the unit
- **POWER REQUIREMENTS:**  
120/277 Volt., 0.1A

## lamp heads

Standard with two fully adjustable PAR 36 size lamp heads furnished with high intensity incandescent lamps or halogen. CA-2 is available with optional 6 watt halogen lamp. CA-3 is available with optional 6, 7, 8, or 10 watt halogen lamp

## battery

6 volt, maintenance-free, recombination, sealed lead calcium. Optional 6 volt maintenance-free sealed nickel cadmium battery available.

## options

(Add Suffix to Model No.)	Suffix
Black Finish . . . . .	-B
Self Diagnostics . . . . .	-SD
Voltmeter (not available with diagnostics) . . . . .	-V
Cord and plug . . . . .	-3CP
6 watt halogen lamp . . . . .	-LH4
7 watt halogen lamp . . . . .	-LH2
8 watt halogen lamp . . . . .	-LH5
10 watt halogen lamp . . . . .	-LH7
Ni-cad battery . . . . .	-N
Damp location listed . . . . .	-DL

## accessories

(Order as separate item)	Model
Guard . . . . .	WG16
Polycarbonate shield . . . . .	CPS
Poly. Weatherproof shield . . . . .	CPS-4X

**Note:** Certain option combinations may effect the UL listing. Please contact the factory for specifics.

## unit selection chart

Volts	Model No.	Capacity in Watts to 87 1/2 % of Nominal Battery Voltage		Standard Lamps		
		1 1/2 Hrs.	2 Hrs.	Watts/Head	Type	Lamp Rplc. No.
6	CA-2	12	8	6	Incand.	570.0012
	CA-3	20	15	6	Incand.	570.0012

## dimensions

Dimensions are approximate and subject to change.

