



## Die-Formed Steel Exits and Exit/Unit Combos

### Intended Use

Suitable for applications requiring heavy duty steel exit signage and/or unit combo, such as a light industrial warehouse or manufacturing facility.

### Features

20-gauge steel construction. White baked enamel finish standard.

Knockout indicators for choice of direction.

### LX/X

LX – Long-life LEDs feature very low energy consumption and rated life up to 25 years.  
 X – Two long-life, 1,900-hour rated life, energy-efficient incandescent lamps (145V 15T6) consume less than 11 watts per lamp.

Optional DC input for LED lamps (6, 12, 24, 32 and 48V DC source).

Optional DC input with incandescent lamps. (6, 12 and 24V DC source).

Universal mounting — top, back or end. Double face available with top or end mounting only (canopy included).

### HX

Two adjustable lighting heads.

Two long-life 19,000 hour rated life, energy efficient incandescent lamps (145V 15T6) consume less than 11 watts per lamp.

Sealed, lead-calcium maintenance-free battery. Solid-state charger.

Brownout protection and DC fuse.


Low voltage disconnect and AC reset.

Available with top or back mounting (canopy included).

**Listings – CSA Certified.**

## Ordering Information

Example: **LX S W 3 R 120/347 LDC6 CSA**

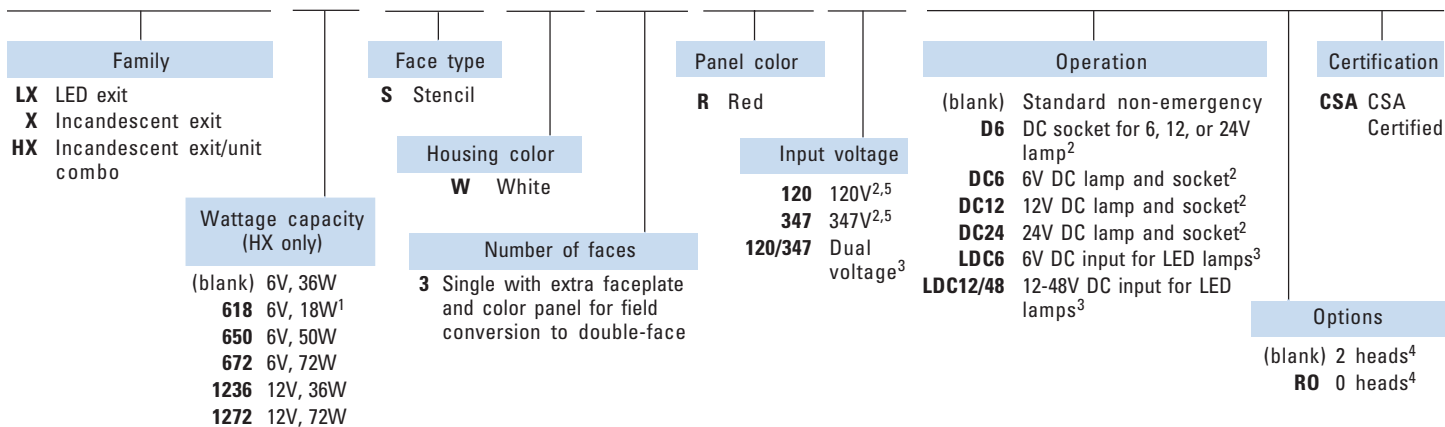

Electrical Application Data – LX, X				
Primary Circuit Type	Volts	Amps	Watts	
LED	120	.05	.62	
	347	.05	.77	
Incandescent <sup>2</sup>	120	.20	24	
	347	.11	26	

Emergency Circuit				
Type	Volts	Amps	Watts	Lamp No.
LDC6	6	.16	.96	CF
LDC12/48	12	.10	1.20	CF
LDC12/48	24	.05	1.24	CF
LDC12/48	32	.04	1.28	CF
LDC12/48	48	.03	1.36	CF
DC6	6	1.5	9	908
DC12	12	.75	9	915
DC24	24	.375	9	EMS2409



  

Electrical Application Data – HX			
Primary Circuit Type	Volts	Amps	Watts
Incandescent <sup>2</sup>	120	.30	33
	347	.11	35

### Accessories (Order separately)

- ELA W US12** 12" pendant stem with white canopy
- ELA WGEX** Back-mount wireguard for exit
- ELA WGEXT** Top-mount wireguard for exit
- ELA WGEXE** End-mount wireguard for exit
- ELA LXSORTIE** Sortie faceplate kit<sup>3</sup>
- ELA X/HXSORTIE** Sortie faceplate kit<sup>4</sup>

Dimensions are shown in **inches (millimeters)** unless otherwise noted.

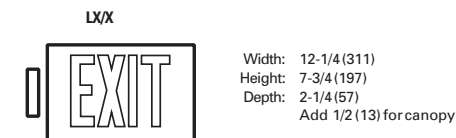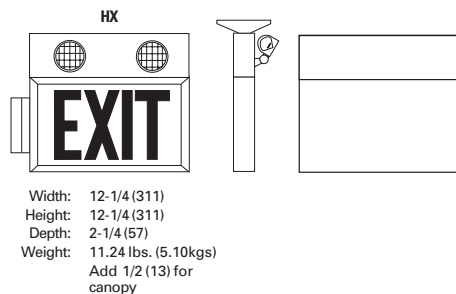

- NOTES:
- 1 Only available with RO lamp head option.
  - 2 Incandescent exits only.
  - 3 LED models only.
  - 4 Available with HX only.
  - 5 Available with incandescent exit/unit combo.