

PRODUCT OVERVIEW

The XLP series 2-headed emergency units have been developed to be architecturally appealing, easy to install and an economical solution to emergency lighting requirements. The injection molded thermoplastic housing is corrosion and flame resistant. The universal mounting plate allows for effortless installation. The standard 5.4W incandescent lamps can be positioned as needed. Damp location rating is standard.




EXTERNAL SPECIFICATIONS

The XLP series is constructed from high quality corrosion and flame resistant thermoplastic. White finish is standard (black color optional). Emergency lighting heads are molded from high impact thermoplastic in a matching color and positioned on a ratcheted track for accurate positioning. Lens material is a high-impact polystyrene. Universal mounting bracket is easily snapped onto the XLP housing. External test switch and monitor LED are standard.

INSTALLATION

The XLP luminaire is suitable for surface wall or ceiling mounting. Suitable for indoor / damp installation on normally inflammable surfaces. 120/277VAC.

DIMENSIONS (in.)

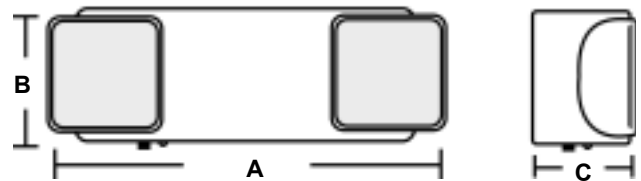

Wattage	A"	B"	C"
2x5.4W (S1)	11.7"	4.2"	5"
2x5.4W (S2)	12"	4.2"	5"

ORDERING INFORMATION

Series	Model	Options
XLP	S1 (6V 12W) S2 (6V 18W)	BLK (black housing)

EXAMPLE: XLP-S2-BLK
DESCRIPTION: XLP emergency luminaire, emergency only, 6V 18W, damp location, black housing.



XLP Technical Data

HOUSING

The XLP series utilizes a corrosion and flame resistant injection molded thermoplastic housing and mounting bracket. Lightweight and durable, the XLP is ideal for use in areas where materials such as steel and aluminum may deteriorate. The bracket connection allows installation to a standard wall mounted junction box.

EMERGENCY SPECIFICATIONS

The XLP series emergency luminaire is configured for standard operation 120/277VAC dual voltage input with current limit protection. Current charge regulator is standard. Minimum 90 minutes emergency duration. 24 hour charge time.

BATTERY

The XLP series is supplied with a maintenance free, sealed valve regulated lead acid battery for emergency operation that provides a minimum emergency duration of 90 minutes (for the listed rating). The S1 model comes standard with a 6V 4Ah battery. The S2 model comes standard with a 6V 7Ah battery for remote capability. Recharge time of the battery is twenty-four (24) hours. The maximum working temperature is 50°C

LAMP HEAD FEATURES

The XLP series is normally supplied with two (2) front mounted square heads with 5.4W wedge base incandescent lamps. Lamp heads are mounted within a ratcheted track that allows correct and accurate beam positioning. Lamp heads are constructed of high impact thermoplastic in a color matching the finish of the housing (white is standard). Lens material is a high-impact polystyrene.

DAMP LOCATION RATED

The XLP series emergency luminaires come standard rated for damp location installations. The XLP is an ideal solution for exterior covered breezeways, warehouses, covered corridors and high humidity regions.

UNIVERSAL MOUNTING

The XLP emergency lighting unit uses a universal mounting bracket that snaps into the XLP housing. Easy field wiring and durability make the XLP a favorite among contractors.

WARRANTY

The XLP comes from the factory with an unconditional 5 year product warranty. Lamps are not covered.