



# ASTRALITE INVERTER


## SINGLE PHASE 350W - 2KW

### WARRANTY

- 1-year full warranty on system electronics
- 1-year full warranty with 9-year pro-rated warranty on battery
- Extended warranty available
- Maintenance contracts available
- 1-year on-set warranty labor if the inverter system is commissioned by Astralite and is performed by an Astralite authorized service agent

### CABINETS

- Space saving, small footprint with modular designs allows for flexible installation
- Standard free standing enclosure with power coat finish
- Optional NEMA – 3r, 4x, or 12 Cabinets with forced air cooling for maximum reliability
- Dimensions - W x H x D - 24" x 26" x 16"

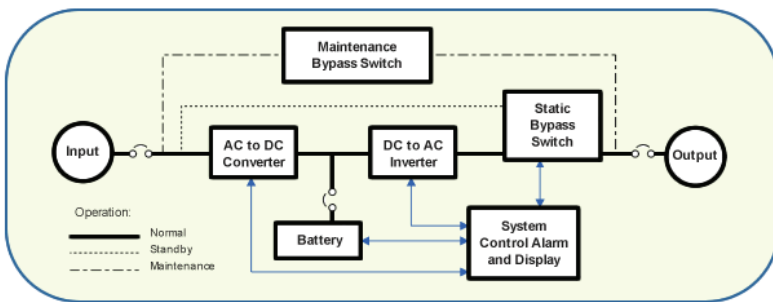

### ORDERING INFORMATION:

INV-P1 — — —				
FAMILY	POWER RATING	VOLTAGE		OPTIONS
	VA/W	Input	Output	
	350	120	120	ETM120 - 120V Environmental control module /qty
	525	208	277	ETM277 - 277V Environmental control module /qty
	700	240	120-240	SPC - Specialized enclosure*
	875	277	120-277	NF - Normally standby configuration
	1050			OCB - 20 Amps output circuit breakers /voltage/quantity
	1400			SRM - Seismic rated bracket
	2000*			STUM - Onsite start-up
				IDB - Internal dimmer bypass
				EMB - External maintenance bypass switch
				EW - Extended warranty

\* Consult factory for more options

# INV-P1-350/2K



### STANDARDS

- Listed to UL924, meets NFPA 101, NFPA 70, NEC and OSHA standards

### APPLICATIONS

- True online lighting inverter with full light output
- Operates fluorescent, compact fluorescent, incandescent, quartz, H.I.D., L.E.D., and other lamp types

### MAINTENANCE

- Hassle-free maintenance – the unit automatically performs periodic self-tests

### DIAGNOSTICS AND CONTROLS

- Advanced front panel LED display indicating unit status, metering, battery status, alarm event log
- Single point of testing