

TRUSTED BATTERY SOLUTIONS
















## **PSH-655FR** 6V 5.5 AH @ 20-hr. 95.9 W/Cell @ 15-min.

**Rechargeable Sealed Lead Acid Battery PSH - High-Rate Series** 

## TERMINALS (mm)

F1: Quick disconnect tabs, 0.187" x 0.032" - Mate with AMP. INC. FASTON "187" series



Torque - Not Applicable


## **FEATURES**

- Absorbent Glass Mat (AGM) technology for superior performance
- Designed specifically for high-rate discharge applications
- Valve regulated, maintenance free spill proof construction
- Exceptionally high energy density
- Constant power (watts/cell)
- Rugged vibration and impact resistant ABS case and cover flame retardant to UL94-V0

## **APPROVALS**

- Approved for transport by air. D.O.T., I.A.T.A., F.A.A. and C.A.B. certified
- U.L recognized
- ISO9001:2015 Quality management systems


## **DIMENSIONS inch (mm)**



2.76 (70) **W**: 1.85 (47) H: 3.94 (100) **HT**: 4.17 (106)

Tolerances are +/- 0.04 in. (+/- 1mm) and +/- 0.08 in. (+/- 2mm) for height dimensions. All data subject to change without notice





## **CORPORATE HEADQUARTERS** (USA AND INTERNATIONAL EXCLUDING EMEA)

**Power-Sonic Corporation** 7550 Panasonic Way, San Diego,

California 92154 T: +1 (619) 661 2020

F: +1 (619) 661 3650

**E**: customer-service@power-sonic.com

## **POWER-SONIC EUROPE LIMITED**

(EMEA - EUROPE, MIDDLE EAST AND AFRICA)

3 Buckingham Square, Hurricane Way, Wickford, Essex SS11 8YQ

T: +44 (0)1268 560686 F: +44 (0)1268 560902

E: salesEMEA@power-sonic.com

## PERFORMANCE SPECIFICATIONS

	FERFURMANGE SPECIFICATIONS		
	Nominal Voltage		6 volts (3 cells)
	Nominal Power (15 min.)		95.9 W/Cell
	5-hr.	(275mA to 5.25 volts) (950mA to 5.10 volts) (540mA to 5.25 volts) (3.7A to 4.50 volts) (11.2A to 4.50 volts)	5.50 AH 4.75 AH 5.40 AH 3.70 AH 2.80 AH
	Approximate Weight		2.10 lbs. (0.95 kg)
	Internal Resistance (approx.)		10.0 milliohms
	Max Discharge Current (5 Sec.)		16.5 amperes
	Max Short-Duration Discharge Current (10 Sec.)		55.0 amperes
	Shelf Life 1 Month 3 Month 6 Month	(% of nominal capacity at 68°F (20°C)	97% 91% 83%
	Operating Charge Discharge	Temperature Range	5°F (-15°C) to 122°F (50°C) -4°F (-20°C) to 140°F (60°C)
	Case and Cover		Flame Retardant ABS Plastic UL94:V-0
	Power So	nic Chargers	PSC-6500A-C PSC-61000A-C

PSC-61000-PC




## PSH-655FR 6V 5.5 AH @ 20-hr. 95.9 W/Cell @ 15-min.

Rechargeable Sealed Lead Acid Battery **PSH - High-Rate Series** 


# CONSTANT POWER DISCHARGE (WATTS/CELL) AT 25°C (77°F)

### 1.75 168.4 121.7 959 60.9 45 37 1 1.70 180.3 129.6 101 85 63.1 47 38.2 PSH-655FR 103.8 64.9 47.5 38.8 1.67 17.7 135

## **DISCHARGE CHARACTERISTICS**



## **SHELF LIFE & STORAGE**

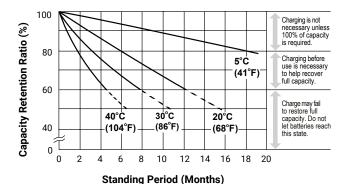

### **CORPORATE HEADQUARTERS** (USA AND INTERNATIONAL EXCLUDING EMEA)

**Power-Sonic Corporation** 

7550 Panasonic Way, San Diego, California 92154

T: +1 (619) 661 2020 F: +1 (619) 661 3650

E: customer-service@power-sonic.com

## POWER-SONIC EUROPE LIMITED

(EMEA - EUROPE, MIDDLE EAST AND AFRICA)

3 Buckingham Square. Hurricane Way, Wickford, Essex SS11 8YQ

T: +44 (0)1268 560686 F: +44 (0)1268 560902

E: salesEMEA@power-sonic.com

## **CHARGING**

Cycle Applications: Apply constant voltage charge at 2.35v/c - 2.45v/c (14.1 – 14.7v for 12v Monobloc) at 20°C. Initial charging current should be set at less than 0.25C Amps. Switch to float charge to avoid overcharging.

"Float" or "Stand-By" Service: Apply constant voltage charge of 2.25v/c - 2.30v/c (13.5 to 13.8 volts for 12v Monobloc at 20°C. When held at this voltage, the battery will seek its own current level and maintain itself in a fully charged condition.

**Temperature Compensation:** Charging Voltage for both Cyclic and Standby applications should be regulated in relation to ambient temperature. As temperature rises charging voltage should be reduced to prevent overcharge and increased as temperature falls to avoid undercharge.

For further charging information including temperature compensation factors, see Power Sonic Technical Manual/ Power Sonic Charger specifications.

## **APPLICATIONS**

- UPS
- Telecoms
- Data Center
- Fire and Security

## **CHARGERS**

Power Sonic offers a wide range of chargers suitable for batteries with a variety of capacities.

Please refer to our website for more information on our switch mode and transformer type chargers.

Please contact our technical department for advice if you have difficulty in locating a suitable charger.

## **FURTHER INFORMATION**

Please refer to our website www.power-sonic.com for a complete range of useful downloads, such as product catalogs, material safety data sheets (MSDS), ISO certification, etc.