Survive-All™ SVH Series

Class I, Division 2 housing 6V-18W & 12V up to 72W capacities





Housing

- Class I Division 2, Groups A, B, C and D
- Vandal-resistant UV stabilized polycarbonate lamp cover
- Front and back plates are of a heavy duty aluminum
- Stainless steel tamper-proof screws

Mounting:

- · Surface wall mount only
- Includes mounting lugs on each side of the housing
- Universal J-box mounting
- 1/2 inch entry on both sides and top of housing

Lamp type

· Choice of MR16 LED lamp wattages

Electronics

- · Pulse plus charger
- · Low voltage disconnect
- Automatic brownout protection
- · Battery lock-out
- Fused output circuit

- Magnetic test switch
- Standard Advanced Diagnostics (non-audible)
- Optional Nexus® monitoring system
- 120/277 60Hz

Battery type

• 6 or 12V lead-calcium battery

Approvals


- CSA-US (to UL 924 standards)
- Evaluated to the UL 844 Standard for Class I Division 2, Groups A, B, C and D
- NEC, OSHA and NEMA compliant for above Classes and Groups
- Damp and wet location (50°F to 104°F)

Warranty

Unit has a five-year limited warranty
Detailed warranty terms located on page 202 or online at:
www.emergi-lite.com/usa/files/EL_Warranty.pdf


Photometric performance

	Spacing center-to-center (feet)		
Lamp	7' mounting height	15' mounting height	
LA	39'	34'	
LB	74'	57'	
LG	49'	39'	
LI	68'	54'	
LJ	89'	80'	

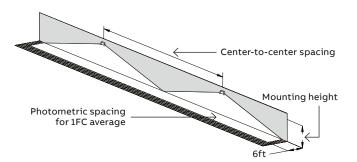

Dimensions

Dimensions are approximate and subject to change.

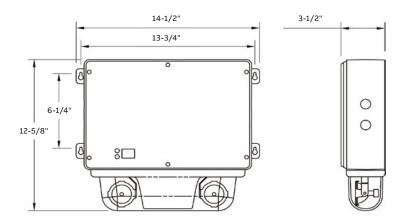

Temperature codes

Lamp rating¹	Temperature code	Max. temperature	Replacement part #
6V-4W	T4A	120°C	580.0097
6V-5W	T4A	120°C	580.0122
12V-4W	T4A	120°C	580.0080
12V-5W	T4A	120°C	580.0104
12V-6W	T4A	120°C	580.0106

 $^{^{\}scriptsize 1}\text{Use}$ qualified replacement lamps to avoid risk of over-heating

Power consumption and unit rating

						Battery capac	ity in watts
Model		AC specs	1-1/2 hrs	2 hrs	3 hrs	4 hrs	8 hrs
SVH18		0.17 / 0.09 Amp	18	12	9	_	
12SVH36	120/277VAC —	0.30 / 0.15 Amp	36	27	18	14	_
12SVH60		0.30 / 0.15 Amp	60	45	30	24	12
12SVH72		0.30 / 0.15 Amp	72	54	36	28	14

How to order

Color	Voltage and power	# of heads	Lamps	Options
G = Gray	SVH18M= 6V-18W, lead-calcium	-2= Two heads	LA = 6V-4W, MR16 LED	Blank = Advanced Diagnostics (non-audible)1
	12SVH36M= 12V-36W, lead-calcium	-0= No heads	LB = 6V-5W, MR16 LED	-DA= Advanced Diagnostics (audible)1
	12SVH60M= 12V-60W, lead-calcium		LG= 12V-4W, MR16 LED	-D3= Time delay (15 minutes)
	12SVH72M= 12V-72W, lead-calcium		LI= 12V-5W, MR16 LED	-NEXRF= NEXUS® wireless
			I 1= 12V-6W MR16 LFD	(consult your sales representative)1

Example: G12SVH72M-2MK-DA