



TYPE \_\_\_\_\_

CATALOG# \_\_\_\_\_

**LS-WM (WALL MOUNT)  
Die Cast Light Style™  
Cold Cathode Edge Lit  
Recessed Wall Mount**

DIE CAST LIGHT STYLE™ SERIES

**GENERAL DESCRIPTION**

A brilliant combination of superior performance and aesthetics, the LSCM Cold Cathode (Fluorescent Lamps) Edge lit Exit sign provides a solution for the medium to upscale application. Uniquely crafted from Die Cast, the LS-CM collection is flexible enough to meet all of your stringent mounting requirements with all of the options necessary to facilitate life safety in the event of power loss.

**HOUSING**

Rigid Galvanized steel back box recesses into any ceiling or wall application complete with all necessary mounting hardware. The trim plate is machined and hand crafted from a solid Aluminum casting. Brushed Aluminum is standard.

**PANEL FACE**

Injection Molded Acrylic uniquely contoured with diamond cut beveled edges offers your choice of frequency matched silkscreened 6" lettering and chevrons. Custom signage is also available. (Consult Factory)

**ILLUMINATION**

Bright White (full Color Spectrum) even illumination enhances the beauty of the design via low maintenance long life cold cathode lamping with an estimated life expectancy of 7 plus years.

**ELECTRONICS**

AC only and emergency operation options available. Provides 90 minutes of illumination upon loss of power. Emergency operation units provided with solid-state design with low voltage disconnect, AC lock-out, brown out protection, and AC indicator test switch. Battery is sealed maintenance free Nickel Cadmium with an estimated service life of 7 years. Circuitry is constant current design and recharge time is less than the required UL 924 standard. All units draw less than 7 watts.


**CODE COMPLIANCE**

Tested and listed to UL 924. Meets or exceeds NAPA NEC and OSHA illumination standards.

**WARRANTY**

5 years on housing and electronics with a 7 year pro rated warranty on the battery.

**DIMENSIONS**

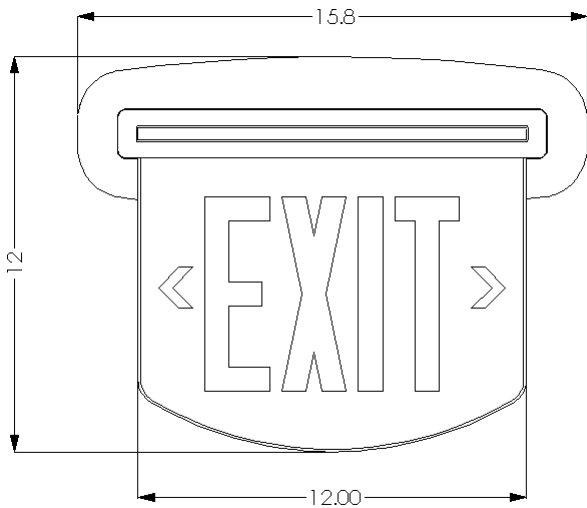

LS-WM	1					
Model	No. of Faces	Letter Color / Background	Chevron Direction	Battery Backup	TRIM FINISH OPTIONS	
Single Only Available	RC=Red on Clear (note 1) RW=Red on White RB=Red on black RM=Red w/mirrored GC=Green on Clear (note 1) GW=Green on White GM=Green w/ Mirrored GB=Green on black  note 1: single sided only	NC No Chevron AR Right AL Left AD Double	AC AC Only EM Emergency	BA BRUSHED ALUMINUM (STANDARD) WH POWDER COATED WHITE BK POWDER COATED BLACK		



DC 010B

DC 10