



TYPE _____


CATALOG# _____

LG-NY-500 8" Combination Edge-Lit Exit



LG-NY-500

Ceiling Mount Only

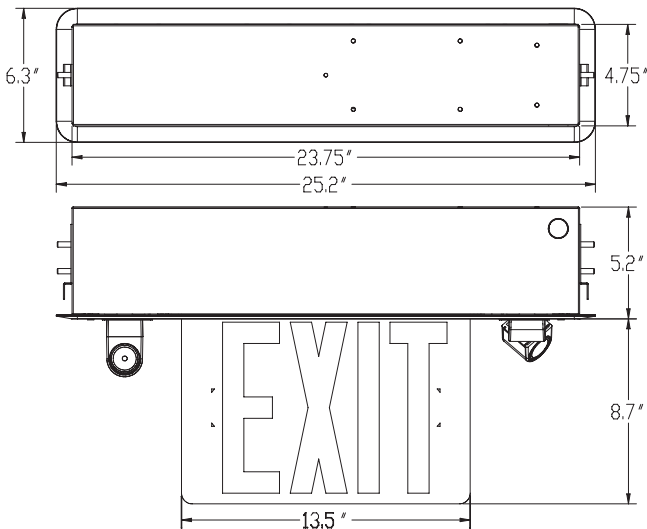

GENERAL DESCRIPTION

The Light Style 8" Edge-Lit Combination Exit provides a thin profile design that complements upscale commercial and retail architectural applications. Exit Illumination is provided with the highest quality LEDs (AlInGaP) for even light distribution and trouble free operation. The telescoping heads utilizing 6 Watt MR-11 Halogen lamps provide great illumination at the point of egress.

HOUSING

Recessed ceiling mount design provides the contractor with on-the-job easy installation.

TRIM PLATE

Brushed Aluminum standard finish. Also available in your choice of anodized or powder coated finishes. (See Options below.)

EXIT DESIGN

The face design features 8" letters with 1" stroke. Directional indicators are custom field installable. Meets UL and NFPA standards.

MR-16 ADJUSTABLE HEADS

Utilizing two 6 Watt MR-11 fully adjustable lamp heads, the LG-NY-500 provides great illumination. Matching remote heads and optional 6 Watts remote are also available.

ELECTRONICS

Input is standard dual volt 120/277 60Hz. This unit features solid state design with Low Voltage Disconnect (LVD), AC lockout, brown out protection, and AC indicator LED with test switch. Provides 90 minutes of illumination upon loss of power. Battery is maintenance-free sealed lead acid with an estimated service life of 5 years. Optional Nickel Cadmium battery available.

CODE COMPLIANCE

UL 924 listed. Meets NFPA, NEC, and OSHA illumination standard.

WARRANTY

5 years on housing and electronics and a 5 year pro rated warranty on battery.

LIGHT STYLE SERIES™

LG-NY-500

Model Number

Aluminum Exit
With MR-11 Halogen
Lamps.
Ceiling Recessed
Mounting Only



No. of
Faces

1=Single
2=Double



Letter Color/
Background

RC=Red on Clear*
RW=Red on White
RB=Red on black
RM=Red w/mirrored
GC=Green on Clear*
GW=Green on White
GM=Green w/ Mirrored
GB=Green on black

* single sided only



Trim
Colors/finish

*BA=Brushed Aluminum (Standard)
WH=Powder Coated White Trim plate
BLK=Powder coated Flat Black Trim Plate
DB=Dark Bronze Finish
BR=Brass Type Face Plate

*Standard



Factory
Installed Options

REM Remote 6v 10 Watt output.
SD Self Diagnostic
NC NiCad Battery
220 220VAC 50/60HZ INPUT



NS 010A