



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

## SPECIFICATIONS

### FEATURES

- Heavy duty remote capable steel emergency lighting unit
- Remote capable: 180W unit capacity
- Designed for wall mounting

### CONSTRUCTION

- 20-gauge steel construction
- Finished in a powder coat in white or black

### LAMP

- Adjustable square heads with 10W bi-pin halogen lamps

### ELECTRONICS

- Dual-voltage input capability: 120/277
- Low-voltage disconnect
- AC lockout
- Brownout protection
- AC indicator light with test switch
- Voltmeter comes standard

### BATTERY

- Nickel-cadmium battery comes standard
- Operating temperature range: 0 °C to 40 °C
- Provides a minimum of 90 minutes of illumination upon loss of power

### COMPLIANCE

- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards
- NYC approved

### WARRANTY


- 5-year warranty on housing and electronics. Battery is prorated

## EU-HD-180

180W HEAVY DUTY EMERGENCY UNIT



## DIMENSIONS

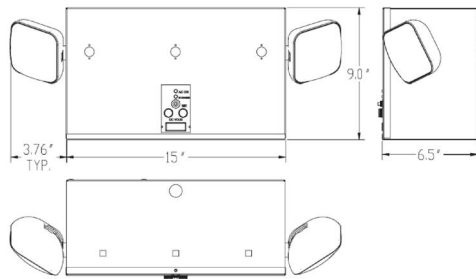

Material	Battery	Code Compliance	Dimensions
Steel	Nickel-cadmium	UL 924	15" W X 9" H X 6.5" D

## ORDERING GUIDE

MODEL	HOUSING COLOR	DC VOLTAGE	HOUSING COLOR	OPTIONS
EU-HD-180	NH <sup>2</sup> No Head	12V 12 Volts	W White B Black	220 220 VAC Input LC Line Cord FU 2 Front Panel Mount Fuze RTS Remote Test Switch TPS Tamperproof Screws TPSD Tamperproof Screwdriver TD <sup>1</sup> Time Delay
	2 <sup>2</sup> Two Head			
	3 <sup>2</sup> Three Head			

### Notes:

1. Must Specify AC input Voltage and Delay Time
2. To determine maximum remote wattage, subtract total integral lamp watts from total DC unit wattage