



MODEL NO: _____
 TYPE: _____
 PROJECT: _____
 COMMENTS: _____

INITIAL LUMEN OUTPUT
 1300 Lumens

LAMPS OPERATED*



(1) 10W-70W 4-PIN Compact (2) 10W-32W 4-PIN Compact
 *Refer to Lumen Reference Chart for list of compatible lamps

DESCRIPTION

The **ICE420** from IOTA Engineering is a UL Listed fluorescent emergency ballast for use in cold-weather applications that allows the same fixture to be used for both normal and emergency operation. In the event of a power failure, the **ICE420** switches to the emergency mode and operates **one or two** of the existing lamps for **90 minutes**. The **ICE420** can be used with 10W to 70W 4-pin compact fluorescent lamps, providing an initial output of up to **1300 lumens** for one or two lamps, and features lamp selector leads for optimizing the light output for designated lamp types. The unit contains a battery, charger, and inverter circuit in a single can, in addition to temperature control circuitry and an internal heating element. The heating element and temperature control circuitry protect the battery pack from freezing during normal AC operation and allows the battery pack to reach acceptable operating temperatures before reactivating the charging circuit.


SPECIFICATIONS

Input Voltage	(Dual) 120/277V, 60Hz
Input Wattage	3.5 Watts
Wattage Draw (when heating element is on)	100 Watts
Lamps Operated	10W-70W 4-pin Rapid Start Compact Lamps including Twin, Triple, Quad Tube, 2D & Straight
Emergency Operation	(1) 10W-70W or (2) 10W-32W 90 minutes
Initial Illumination	(1) lamp 1300 lumens (2) lamps 650 lumens each lamp
Operating Temp	-18° to 50° C
Battery	24 Hour Recharge 7-10 Year Life Expectancy
Weight (configuration)	5.6 lbs. (A) 3.6 lbs. (B)
Approval	UL and CUL Listed



DIMENSIONS

13.3" x 2.4" x 1.5" (mounting center 12.75")

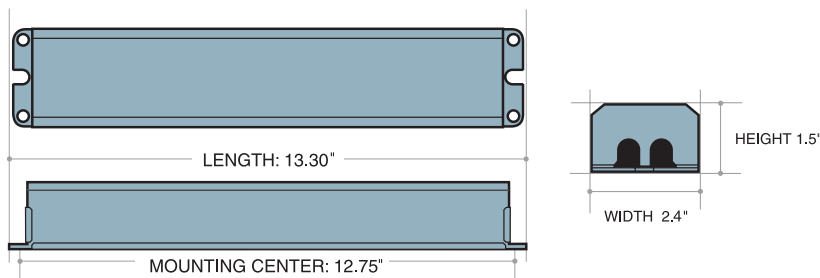


PRODUCT ADVANTAGES

- **Designed for outdoor paths of egress and freezing environments**
- **Internal Heating and Temperature Control protects the battery from freezing conditions**
- **Damp Location Rated**
- **Time Delay feature for compatibility with End-of-Lamp-Life circuitry**
- **Open Circuit Isolation protects unit when load is absent**

FEATURES

- Will cold start and operate all specified lamps
- Long life high temperature recyclable Ni-Cad battery
- Galvanized steel case
- Available in dual-flex or integral no-flex configuration
- Includes test switch and charge indicator accessories
- For use with switched or unswitched fixtures
- **5-Year Warranty**
- Lamp selector leads optimize light output for desired lamp type
- Rated for use in damp locations, plenum, and recessed Type IC fixtures
- Meets or exceeds all NEC, IBC, and Life Safety Code Emergency Lighting Requirements
- RoHS Compliant




FLUORESCENT

COLD-WEATHER

ICE420

COLD WEATHER FLUORESCENT EMERGENCY BALLAST

CONFIGURATION

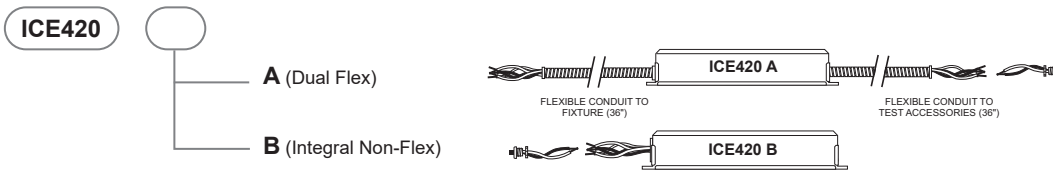

ICE420 SAMPLE SPECIFICATION


Emergency lighting shall be provided by using a fluorescent fixture and lamp(s) rated for exterior installation conditions equipped with an **IOTA ICE420** fluorescent emergency battery pack. The **ICE420** shall consist of a high temperature, maintenance-free nickel cadmium battery, charger board and an electronic circuit enclosed in a 13.3" x 2.4" x 1.5" vandal-resistant galvanized steel case. The unit is designed for installation on top of or within the fixture and is equipped with 1/2" flex for wiring to the fixture or ballast compartment. A long-life LED charge indicator light and test switch shall be included. The fluorescent EM pack shall operate one 10w-42w, 57w, or 70w or two 10w-32w twin, triple, quad tube, 2D or straight **4-pin** fluorescent lamps. The **ICE420** shall provide reduced illumination for a minimum of 90 minutes in the emergency mode with a total initial output of 1300 lumens, and will feature lamp selector leads for optimizing light output for the designated lamp type. The **ICE420** shall have 3.5 watts of input power with the heating element off, 100 watts (.83 amps) with the heating element on, and a battery capacity of 24 watt hours. The **ICE420** is UL Listed and meets or exceeds all NEC and Life Safety Code Emergency Lighting Requirements. The **ICE420** is warranted for a full five (5) years from the date of purchase.

INITIAL LUMEN RATINGS*

LAMP	1 LAMP	2 LAMPS
13W PL CF 4-PIN	600	675
18W PL CF QUAD 4-PIN	600	950
26W PL CF QUAD 4-PIN	725	1200
32W PL CF QUAD 4-PIN	1050	1250
42W PL CF QUAD 4-PIN	1300	
57W PL CF QUAD 4 PIN	1160	
70W PL CF QUAD 4-PIN	1200	
F282 D/42 4-PIN	800	850
F382 D/42 4-PIN	850	1125

*Rated lumens measured @ 25° C.

TEMPERATURE CONTROLS

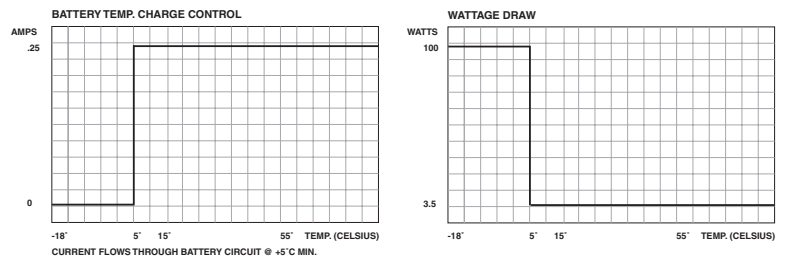

REMOTE MOUNTING

When battery packs are remote mounted, consult Customer Service for the maximum allowable distance between the battery pack and lamp(s).

Warranty: 5-Year Limited Warranty

Complete warranty terms located at www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx